SAFETY PRECAUTIONS

- 1. Make sure incoming pressure does not exceed the rated pressure.
- 2. Use proper eye protection when assembling and using the hose reel.
- 3. Assemble the hose reel on a clean workbench free of debris and moisture.
- 4. Use soap and water when checking for air leaks.
- 5. Keep children away from work area.

WARNING!

Exposure of skin directly to pressurized air or fluids could result in severe bodily injury!

Ref 300918 Rev. A 12-12

General Pump

1174 Northland Drive • Mendota Heights, MN 55120 Phone: 651.686.2199 • Fax: 800.535.1745

www.generalpump.com • email: sales@gpcompanies.com



HOSE

REELS

FROM GENERAL PUMP

- DIRECT HAND-CRANK REWIND WITH LOCKING MECHANISM

- SOLID STEEL CONSTRUCTION
- DURABLE POWDERCOAT FINISH
- FULL FLOW SWIVEL BRASS JOINT

2100367

(100 Ft., 25" Pigtail)

2100368

(150 Ft., 32" Pigtail)

2100369

(150 Ft., 56" Pigtail)

OPERATOR'S MANUAL

Ref 300918 Rev. A 12-12








ASSEMBLY AND OPERATING INSTRUCTIONS

- Connect the handle to the flange. Nuts go on handle side of flange.
 Use (4) 3/8" or 10 mm bolts when securing the hose reel to ceiling or wall.
- 3. Use the provided nuts, bolts and mounting bracket when securing hose reel to a cart.
- 4. Use thread sealant (not provided) on inlet threads and on outlet hose (not provided).
- 5. Attach pigtail end to high pressure pump outlet.
- 6. Attach hose reel hose to swivel on hose reel
- 7. The hose reel is ready for operation.

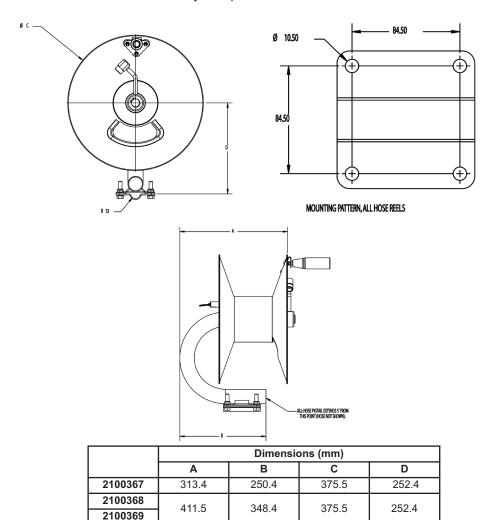


Ref 300918 Rev. A 12-12

SPECIFICATIONS

Model	3/8" Capacity	Swivel Pressure Rating	Inlet	Outlet
2100367	100 Ft.		3/8" NPT-M	3/8" NPT-F
2100368	150 Ft.	5000 PSI		
2100369	150 Ft.			

MAXIMUM TEMPERATURE RATING: 185°F

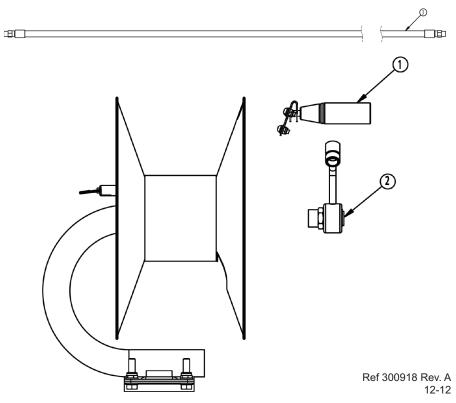

PARTS LIST

	Item			
	1	2	3	
2100367	100056	2103051	2702063	
2100368	100056	2103051	2702065	
2100369	100056	2103051	2702067	
2100278	SWIVEL REPAIR KIT			